MOBILE FACILITY USER MANUAL

COUPLING AND UNCOUPLING

1. Attach the safety cable to the coupling hook
2. Lift the coupling device of the trailer onto the ball mount of the towing vehicle and push it down until the coupling device locks into place
3. Make sure the coupling device is in locked position

SUPPORT LEGS

Before using the trailer extend the support legs using the crank attached on the main door. Makes sure the trailer is parallel to the ground.

NB! Most of the mass must be on axle, support legs are only to increase stability

BEFORE DRIVING

1. Make sure there are no loose items in the trailer
2. Chairs are fixed into position and held with a rubber band
3. Window (and window cover if added) are locked
4. Removable stairs are mounted onto the door and fixed
5. Support legs are in upper position
6. Doors are locked and the key is not in the lock
7. Trailer is correctly coupled to the vehicle
8. Lights are working properly

USING THE TOILET

To fill the water tank, unscrew the cap and fill until water reached the bottom level of the sink



To empty the toilet tank and add chemical contact your local service provider

To empty the tank at a designated area, pull the red leaver under the trailer frame.



Clean the tank and valve with water when tank is empty

Before using the, fill toilet tank with toilet chemical up to 1/3 of the tank or according to the chemical manufacturer’s recommendations

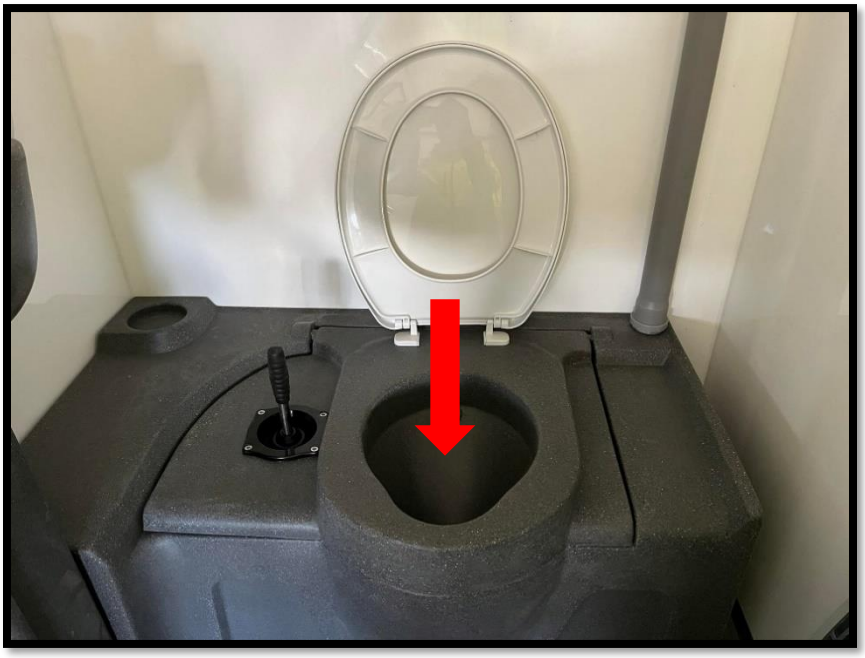

NB! During cold seasons always empty water and waste tanks before room temperature gets to 0° C.